

## 30-Gallon

### Industrial Two Stage – Diesel

The two-stage, 30-gallon diesel air compressor is known for consistent and reliable air power, perfect for industrial, automotive and service body applications.

#### COMPRESSOR PUMP


- Cast iron compressor pump
- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

#### ENGINE

- Electric start – battery, box and cables not included
- Glow plug equipped for easy starting in cold temperatures

#### FRAME

- Powder coated ASME receiver tank
- 3/16-inch base plate to reduce vibration
- Powder coated two-piece belt guard
- Removable base plate offers flexible installation

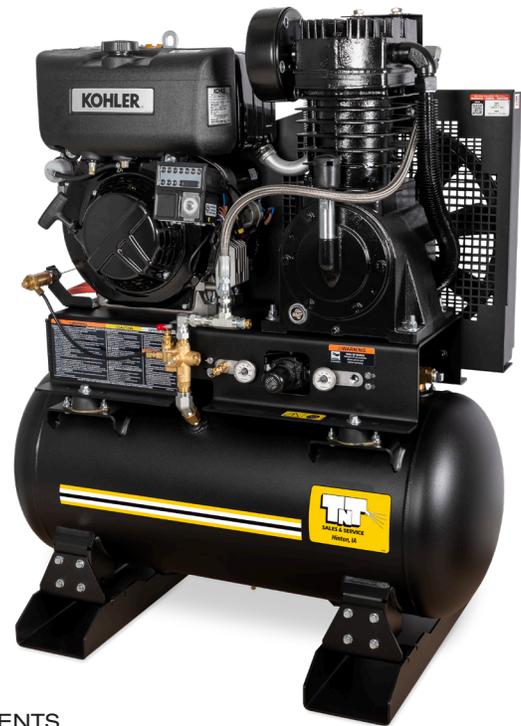

ABS-9KD-30H

#### COMPONENTS

- Regulator and two gauges for tank and outlet pressure
- ASME safety valves
- Tank drain valve
- 1/2-inch port
- Start/stop control set at 145 to 175-PSI

#### LIMITED WARRANTY

- 3 year engine

#### CERTIFICATION

- ASME Boiler and Pressure Vessel Code – UM

MODEL NUMBER	CFM @ PSI*	HORSEPOWER/ENGINE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
ABS-9KD-30H	29.0 @ 175	9.1 HP Kohler KD440 OHV	Cable throttle	38x23x46.5in.	540 lb.	483 lb.

\*Equipped with 150-PSI maximum rated regulator.

#### ACCESSORY:

PART NUMBER	DESCRIPTION	FITS MODEL
AW-6000-1002	Equipment cover – Keeps your equipment clean, dry and looking like new	ABS-9KD-30H

#### OPTIONS: *Options must be ordered with unit and cannot be added later.*

PART NUMBER	DESCRIPTION	FITS MODEL
AX-0079	Battery box, cables and tray – Attaches to engine side of unit	ABS-9KD-30H
IX-0001	Vibration isolator pads – Recommended for models mounted in service truck applications. Isolators protect the unit from vibration during use.	ABS-9KD-30H



**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).