


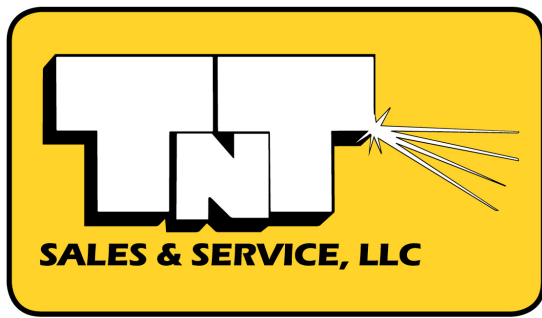

## Inverter Generators

Residential/Commercial Gasoline  
2000-Watt up to 7300-Watt

Inverter generators provide safe, quiet and reliable power with carbon monoxide detection and automatic shutdown.

### INVERTER TECHNOLOGY

- Reduced size, weight, noise and fuel consumption
- Produces commercial quality AC power for sensitive electronic equipment

### ALTERNATOR

- Total harmonic distortion (THD) less than 3%
- Copper windings

### ENGINE

- Low-oil shutdown
- Recoil start (GEN-4000 and GEN-8000 models also have electric start – sealed battery included)

### COMPONENTS

- Equipped with CO detector with automatic shutdown
- DC plug
- USB ports for electronics
- Idle control
- Gas ventilation cap (GEN-2000-IMM1)
- Battery charger (GEN-4000 and GEN-8000 models)
- Digital display for voltage, hertz, run hours and total hours (GEN-4000 and GEN-8000 models)
- Main circuit breaker
- USDA/USFS-approved spark arrestors

### FRAME

- Easy to remove access panels for spark plug, oil and air cleaner
- Handles and wheels (GEN-4000 and GEN-8000 models)
- Tool storage compartment (GEN-4000-IMM1E)
- Outlet covers

### LIMITED WARRANTY

- 3 year engine

### CERTIFICATIONS

- CSA Certified – Canada (GEN-2000 and GEN-3500 models)
- ETL Certified – Canada (GEN-2500, GEN-4000 and GEN-8000 models)



HOM-3506-0E10



HOM-3506-0E10

| MODEL NUMBER            | GEN-2000-IMM1                                | GEN-2500-IMM1                                | GEN-3500-IMM1                                                            | GEN-4000-IMM1E                                                           | GEN-8000-IMM1E                                                                                            |
|-------------------------|----------------------------------------------|----------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| MAX. AC OUTPUT          | 2000 watts                                   | 2500 watts                                   | 3500 watts                                                               | 4000 watts                                                               | 7300 watts                                                                                                |
| RATED AC OUTPUT         | 1600 watts                                   | 2300 watts                                   | 3200 watts                                                               | 3500 watts                                                               | 6800 watts                                                                                                |
| DISPLACEMENT/ENGINE     | 79cc Mi-T-M OHV                              | 120cc Mi-T-M OHV                             | 212cc Mi-T-M OHV                                                         | 225cc Mi-T-M OHV                                                         | 420cc Mi-T-M OHV                                                                                          |
| MAX. AMPS (120V)        | 16.7                                         | 20.8                                         | 29.2                                                                     | 33.3                                                                     | 60.8                                                                                                      |
| CONT. AMPS (120V)       | 13.3                                         | 19.2                                         | 26.7                                                                     | 29.2                                                                     | 56.7                                                                                                      |
| RECEPTACLES             | (1) 120V, 20A GFCI duplex<br>(1) 12V DC 8.3A | (1) 120V, 20A GFCI duplex<br>(1) 12V DC 8.3A | (1) 120V, 20A GFCI duplex<br>(1) 120V, 30A twist lock<br>(1) 12V DC 8.3A | (1) 120V, 20A GFCI duplex<br>(1) 120V, 30A twist lock<br>(1) 12V DC 8.3A | (2) 120V, 20A GFCI duplex<br>(1) 120V, 30A twist lock<br>(1) 120V/240V, 30A twist lock<br>(1) 12V DC 8.3A |
| RATED SPEED             | 5000 RPM                                     | 4400 RPM                                     | 3600 RPM                                                                 | 3600 RPM                                                                 | 3600 RPM                                                                                                  |
| DECIBEL RATING          | 69.0                                         | 67.0                                         | 76.0                                                                     | 56.0                                                                     | 70.0                                                                                                      |
| FUEL CAPACITY           | 1.0 gallon                                   | 1.0 gallon                                   | 1.8 gallons                                                              | 2.1 gallons                                                              | 5.5 gallons                                                                                               |
| RUN TIME (AT HALF LOAD) | 6.0 hours                                    | 5.0 hours                                    | 8.0 hours                                                                | 8.0 hours                                                                | 9.0 hours                                                                                                 |
| DIMENSIONS (LxWxH)      | 19.6x12.5x18.1in.                            | 21.5x13.4x19.3in.                            | 19.8x13.8x19.5in.                                                        | 25.4x18.5x20.4in.                                                        | 34.3x28.6x27.1in.                                                                                         |
| SHIP WT.                | 57 lb.                                       | 68 lb.                                       | 77 lb.                                                                   | 118 lb.                                                                  | 238 lb.                                                                                                   |
| NET WT.                 | 49 lb.                                       | 57 lb.                                       | 66 lb.                                                                   | 105 lb.                                                                  | 227 lb.                                                                                                   |


Note: All gasoline models sold in California are required to have a CARB compliant engine and fuel system. Consult factory.  
Inverter generator ratings represent no-load sound levels. Noise level tested at seven meters (75% load). Rating represents minimum noise level rating.

# Inverter Generators

## Generators – Residential/Commercial Gasoline – 2000-Watt up to 7300-Watt

### ACCESSORIES:

| PART NUMBER  | DESCRIPTION                                                                                                                   | FITS MODELS                          |
|--------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| 32-0915      | RV generator adapter – 30A/125V female/male. Use to connect RV cordsets to 30A generators.                                    | GEN-3500, GEN-4000 & GEN-8000 models |
| 32-1289      | Triple receptacle adapter – Converts (1) L5-30 plug to (3) lighted 5-20 locking receptacles                                   | GEN-3500, GEN-4000 & GEN-8000 models |
| AW-5100-0001 | Parallel port box – Connect two models for a maximum of 3600-watts; includes 30A, 120V outlet and 20A, 120V duplex receptacle | GEN-2000-IMM1 & GEN-2500-IMM1        |
| AW-5100-0002 | Parallel port box – Connect two models for a maximum of 6000-watts; includes 50A, 120V outlet and 20A, 120V duplex receptacle | GEN-3500-IMM1 & GEN-4000-IMM1E       |
| AW-6000-1002 | Equipment cover – Keeps your equipment clean, dry and looking like new                                                        | GEN-8000-IMM1E                       |



120V Duplex  
All Models



NEMA L5-30R  
120VAC  
GEN-3500,  
GEN-4000 &  
GEN-8000 Models



NEMA L14-30R  
120V/240V  
GEN-8000 Model



 **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).